



EK 57C

Ice Cream and Frozen Products

Derby

Derby Product Line for Ice-cream and Frozen Products

When you talk about Derby, you are talking about one of the most traditional brands in the commercial refrigeration market Worldwide.

This line is composed by Upright, Horizontal and Impulse models with a freezer capacity between -7°C and -25°C, ideal for storage of ice-cream, sorbet and frozen products in general.

Find out about Derby's design and technology and ensure your products always enjoy the perfect exposure at the point of sale.

Derby: tradition of innovation, always offering the best design in quality, finishing, and performance.



EK 57C


- **Adjustable thermostat**
- **Aluminium inner liner**
- **Angle top for optimised product view**
- **Branding***
Custom graphics can also be added. The box frame as well as the frames of the glass lids are available in different colours.
- **Castors**
Produce smooth and more controllable movement.
- **Control panel***
- **Curved sliding glass lids**
- **Internal light***
Allowing good product visibility.
- **Lid lock***
Avoids undesirable openings and secures the products inside.
- **Thermometer***
Informs you about internal temperature.
- **Wide assortment of baskets***
Baskets with dividers allow good arrangement of the products.



CURVED SLIDING GLASS LIDS



WIDE ASSORTMENT OF BASKETS



ALUMINIUM INNER LINER



CASTORS



BRANDING*

* Options

EK 57C

DIMENSIONS



Capacity

| | |
|-----------------------------|-------------|
| Gross (liters / cubic feet) | 487 / 17.19 |
| Net (liters / cubic feet) | 426 / 15.04 |

External dimensions

| | |
|----------------------|--------------|
| Width (mm / inches) | 1535 / 60.43 |
| Height (mm / inches) | 895 / 35.23 |
| Depth (mm / inches) | 650 / 25.59 |

Internal dimensions

| | |
|-----------------------|--------------|
| Width (mm / inches) | 1535 / 60.43 |
| Height* (mm / inches) | 550 / 21.65 |
| Depth (mm / inches) | 530 / 20.86 |

Weight

| | |
|----------|----|
| Net (kg) | 83 |
|----------|----|

* Not considered the compartment for the compressor.



TRANSPORTATION



Packaging

| | |
|----------------------|--------------|
| Width (mm / inches) | 1550 / 61.02 |
| Height (mm / inches) | 960 / 37.79 |
| Depth (mm / inches) | 750 / 29.52 |

Loading container

| | |
|---------|---|
| 20 feet | - |
| 40 feet | - |


Piling up

| | |
|---------|---|
| Maximum | - |
|---------|---|

Weight

| | |
|------------|---|
| Gross (kg) | - |
|------------|---|

REAL SIZE

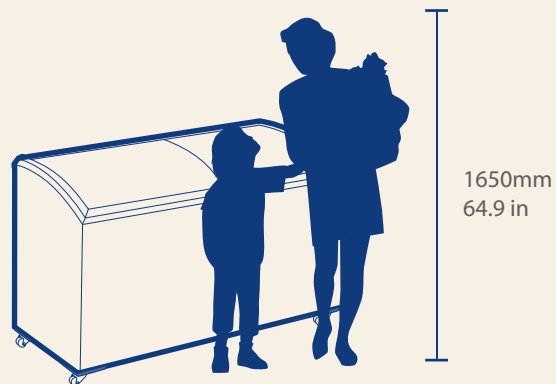

TEMPERATURE RANGE



| | |
|------------------------|--------------|
| Temperature range (°C) | -11 to -22 |
| Temperature range (°F) | 12.2 to -7.6 |
| Climate class | 4 & 4+ |

TECHNOLOGY



| | |
|-----------------------------------|-----------|
| Type of evaporator | Aluminium |
| Type of refrigeration agent (gas) | R134A |

POWER



| | |
|------------------------------|-------------|
| Voltage / Frequency | 120V - 60Hz |
| Voltage / Frequency | 220V - 60Hz |
| Voltage / Frequency | 230V - 50Hz |
| Power (W) | 342 |
| Energy consumption (KWh/24h) | - |

MERCHANDISING AREA



| Sidewall | | Front | |
|-----------------|-----|--------------|------|
| Width (mm) | 636 | Width (mm) | 1585 |
| Height (mm) | 802 | Height (mm) | 674 |

OPTIONS



- Custom Graphics
- Removable Baskets
- Lid Lock
- Internal Light
- Control Pannel
- Thermometer